

3 KNUCKLE FULL MORTISE HINGES

Standard Weight Plain Bearing

1900R – (ANSI A8133) Steel – polished and plated or phosphated and prime coated for painting

1960R – (ANSI A2133) Brass or bronze – polished and plated or painted

1960R (32) – (ANSI A5133) Stainless Steel – polished

1960R (32D) – (ANSI A5133) Stainless Steel – satin finish

- For use on interior or exterior doors without door closers in hospitals, churches, schools, airports, hotels, malls, apartment houses, office buildings, etc.
- All hinges have template screw hole location for use on either wood or hollow metal doors and frames
- Equipped with easily seated, non-rising pins
- Hole in bottom tip for easy pin removal
- Reversible flush tips and pins
- Use anti-friction bearing hinges on high and average frequency doors and all doors equipped with door closers
- Hinges can be furnished with hospital tips (HT)
- Available with exposed tips (ET)
- Available with non-removable pins (NRP)




Size Open		Gauge of Metal		Flat Head Screws/ Per Piece		Quantity		Case Weight			
Inches	(mm)	Inches	(mm)	Machine	Wood	Per Box	Per Case	Steel		Brass	
								Lbs.	(Kg)	Lbs.	(Kg)
3 1/2 x 3	(89 x 76)	.123	(3.1)	6 - 10-24 x 1/2	6 - 10 x 1	2 EA.	100 EA.	60	(27)	64	(29)
3 1/2 x 3 1/2	(89 x 89)	.123	(3.1)	6 - 10-24 x 1/2	6 - 10 x 1	2 EA.	100 EA.	66	(30)	72	(33)
4 x 3 1/2	(102 x 89)	.130	(3.3)	8 - 12-24 x 1/2	8 - 12 x 1 1/4	3 EA.	48 EA.	38	(17)	44	(20)
4 x 4	(102 x 102)	.130	(3.3)	8 - 12-24 x 1/2	8 - 12 x 1 1/4	3 EA.	48 EA.	43	(20)	46	(21)
4 1/2 x 4	(114 x 102)	.134	(3.4)	8 - 12-24 x 1/2	8 - 12 x 1 1/4	3 EA.	48 EA.	51	(23)	54	(25)
4 1/2 x 4 1/2	(114 x 114)	.134	(3.4)	8 - 12-24 x 1/2	8 - 12 x 1 1/4	3 EA.	48 EA.	55	(25)	60	(27)
*5 x 4	(127 x 102)	.146	(3.7)	8 - 12-24 x 1/2	8 - 12 x 1 1/4	3 EA.	30 EA.	40	(18)	43	(20)
*5 x 4 1/2	(127 x 114)	.146	(3.7)	8 - 12-24 x 1/2	8 - 12 x 1 1/4	3 EA.	30 EA.	43	(20)	46	(21)
*5 x 5	(127 x 127)	.146	(3.7)	8 - 12-24 x 1/2	8 - 12 x 1 1/4	3 EA.	30 EA.	46	(21)	51	(23)

* Not Available in Stainless Steel

Conversion Tips and Pins

- Converts standard flush tip “CB1900R” and “1900R”
- Available in three styles, Ball • Crown • Steeple
- Same tips fit “CB”, “1900R” and “F” line hinge
- Conversion pins are stainless
- Conversion pins accept NRP screw
- Knurl eliminates pin rotation
- For heavy weight consult factory

Standard weight Tips and Pins

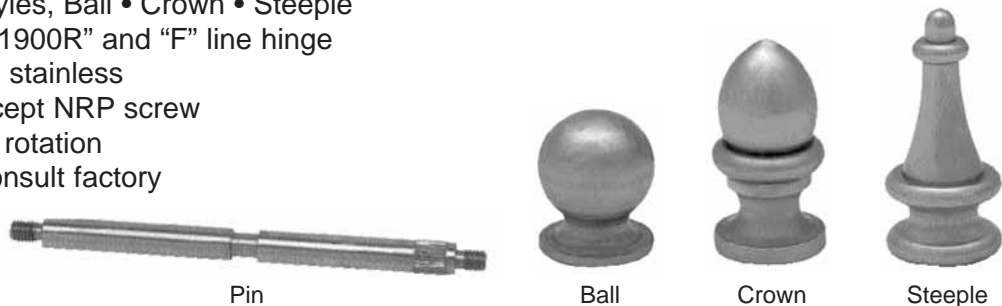

Security Solutions

Stanley Security Solutions, Inc.
6161 E. 75th Street Indianapolis, Indiana 46250
www.stanleysecuritysolutions.com

© 2007 Stanley Security Solutions, Inc. and Stanley Logistics

10M R907
SAH007