


ALUMINUM CONTINUOUS GEARED HINGES

Full Surface Swing Clear **LifeSpan** 

665 – Standard Duty
665 HD – Heavy Duty

- Swings door out of opening at approximately 90 degrees
- Distributes door weight and stress along the full length of door and frame
- No misaligned pivot points of individual hinges
- Clear aluminum and dark bronze anodized finishes
- Standard duty and heavy duty conform to ANSI/BHMA Standard A156.26-1996, Grade 1
- LifeSpan® hinge covered by a limited lifetime warranty for the life of the building
- Engineered with polymer PTFE bearing for maximum durability
- Anti-spinning through-bolts reduce installation labor costs
- Universal cover plates for all configuration
- 90-minute rating standard on all hinges. 3-hour rating available with fire pins (FP)



Fire Pin


Hinges can be furnished as follows:

- with hospital tips (HT)
- with dutch door prep
- custom length

Replacement covers available separately



665

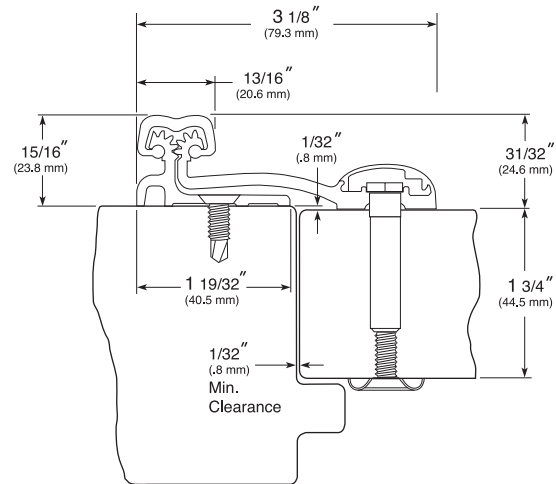

Length		Finish	Number of #12-24 x 5/8" TEK Screws Per Hinge	Number of #12-24 x 1 1/2" Through-Bolts and #12-24 x 1 1/8" Machine Screws Per Hinge	Qty Per Carton	Carton Weight	
Inches	(mm)					Lbs.	(KG)
79	(2006)	AL & DB	34	10	1	7	(15.4)
83	(2108)	AL & DB	34	10	1	7	(15.4)
95	(2413)	AL & DB	38	11	1	8	(17.6)
119	(3022)	AL & DB	42	12	1	10	(22)

Wood and Machine screws available separately