


# 668HD- Heavy Duty Full Mortise

for 1/16" inset doors



- Distributes door weight and stress along the full length of door and frame
- No misaligned pivot points of individual hinges
- For use on 1-3/4" doors only
- Typically no additional reinforcement required
- Clear aluminum, dark bronze and black anodized finishes
- Conforms to ANSI/BHMA Standard A156.26-1996, Grade 1
- Supports doors up to 450 lbs
- Hinge covered by limited lifetime warranty for the life of the building
- Safety hinge application when used without a frame stop

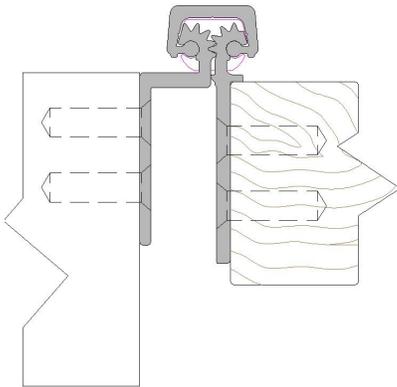

## Hinges can be furnished as follows:

- Dutch door prep (DD)
- School option (SO)
- Custom length (specify length on order)

### How to Order

Series	Option	Option Description	Size (Inches)	Finish
668HD	DD	Dutch door prep (DD)	79	AL
	SO	School option (SO)	83	DB
		Custom length (specify length on order)	85	BK
		Additional fastener options must be ordered separately	95	
			120	

\*Fasteners included: 12-24 x 3/4" undercut self-drilling, thread-forming tek machine screws.

\*\* Hinge comes standard with all tek screws. To order wood screws, please indicate "Half Tek / Half Wood" or "All Wood" at time of order.