

## 5 Knuckle Full Surface Hinges

### Standard Weight Concealed Bearing

**CB171** (ANSI A8312) Steel – polished and plated or phosphated and prime coated for painting


**CB110** (ANSI A2312) Brass or bronze – polished and plated or painted

**CB110 (32)** (ANSI A5312) Stainless steel – highly polished

**CB110 (32D)** (ANSI A5312) Stainless steel – satin finish



- For medium weight kalamein, mineral core, or wood doors with edge rails that won't hold screws of average frequency hung on channel iron frames
- Concealed bearing is maintenance free – no oil, no grease
- Pins in non-ferrous hinges are stainless steel
- Reversible flush tips and pins
- Hinges can be furnished with hospital tips (HT)
- Consider using a back plate with these hinges
- Limited lifetime warranty
- Packed with machine screws and grommet nuts for 1 3/4" doors

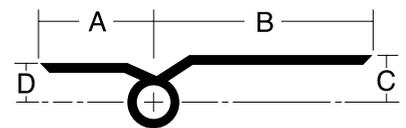

Measurements below

Size Length of Joint	Width		Offset		Gauge of Metal	Flat Head Screws Per Piece		Quantity Per Box	Quantity Per Case	Case Weight	
	Frame Leaf (A)	Door Leaf (B)	Door Leaf (C)	Frame Leaf (D)		Frame Leaf	Door Leaf			Bronze	Steel
Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)					Lbs. (Kg)	Lbs. (Kg)
4 1/2 (114)	1 1/2 (38.1)	2 9/16 (65)	9/16 (14.3)	7/16 (11.1)	.134 (3.4)	3-12-24 x 1/2	3-1/4-20 x 2	3 ea.	30 ea.	40 (18)	38 (17)
5 (127)	1 1/2 (38.1)	2 7/18 (73)	9/16 (14.3)	7/16 (11.1)	.146 (3.7)	4-12-24 x 1/2	4-1/4-20 x 2	3 ea.	24 ea.	43 (20)	39 (18)