

5 Knuckle Full Surface Hinges

Standard Weight Ball Bearing

FBB171 (ANSI A8312) – Steel – polished and plated or phosphated and prime coated for painting


FBB110 (ANSI A2312) – Brass or bronze – polished and plated or painted

FBB110 (32) (ANSI A5312) – Stainless steel – highly polished

FBB110 (32D) (ANSI A5312) – Stainless steel – satin finish



- For medium weight kalamein mineral core or wood doors of average frequency hung on channel iron frames
- Equipped with two Stanley permanently lubricated non-detachable ball bearings
- Pins in non-ferrous hinges are stainless steel
- Reversible flush tips and pins
- Hinges can be furnished with hospital tips (HT)
- Consider using a back plate with these hinges
- Packed with machine screws and grommet nuts for 1 3/4" doors

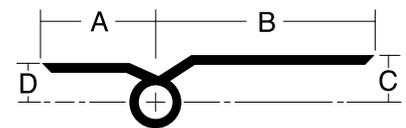

Measurements below

Size Length of Joint	Width		Offset		Gauge of Metal	Flat Head Screws Per Piece		Quantity Per Box	Quantity Per Case	Case Weight	
	Frame Leaf (A)	Door Leaf (B)	Door Leaf (C)	Frame Leaf (D)		Frame Leaf	Door Leaf			Bronze	Steel
Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)					Lbs. (Kg)	Lbs. (Kg)
4 1/2 (114)	1 1/2 (38.1)	2 9/16 (65)	9/16 (14.3)	7/16 (11.1)	.134 (3.4)	3-12-24 x 1/2	3-1/4-20 x 2	3 ea.	30 ea.	40 (18)	38 (17)
5 (127)	1 1/2 (38.1)	2 7/18 (73)	9/16 (14.3)	7/16 (11.1)	.146 (3.7)	4-12-24 x 1/2	4-1/4-20 x 2	3 ea.	24 ea.	43 (20)	39 (18)