

3 Knuckle Pivot Reinforced Hinges

Heavy Weight Concealed Bearing
Shock Proof!

Steel – polished and plated or phosphated and prime coated

CB1907R – (ANSI A8541)

CB1908R – (ANSI A8541)

CB1909R – (ANSI A8541)

Bronze – polished and plated or painted

CB1967R – (ANSI A2541)

CB1968R – (ANSI A2541)

CB1969R – (ANSI A2541)

Stainless steel – satin finish


CB1967R (32D) – (ANSI A5541)

CB1968R (32D) – (ANSI A5541)

CB1969R (32D) – (ANSI A5541)



- Ideal for any door that is subject to jarring or abusive handling
- The purpose of this two-in-one combination is to anchor and reinforce doors and frames exposed to damage from abuse in such installations, stresses are transferred to the top hinge
- A pivot and butt hinge are combined in one compact interlocked unit and share the same pin to assure perfect alignment. Interlocked corners prevent sidewise motion of pivot or butt leaves
- Heavy weight gauges increase available bearing surface area for maximum friction reduction
- Beveled edge doors require a different door plate than square edge doors
- Short door plate [4" (102mm) min.] available for use with most concealed holders and closers – specify on order
- Handed left or right
- Limited lifetime warranty

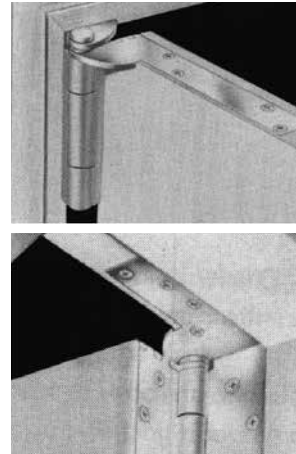

Right Hand Shown

Class Number	Door Edge	Metal	Contents of Set			
			Top Hinge*		Intermediate and Bottom Hinge*	
					Number**	Size Inches (mm)
CB1907R	Square or beveled 1/8" in 2" (3.2 in 51mm)	Steel	1–Type of CB1901R NRP x Frame plate ONLY		2-CB1901R-NRP	5 x 4 1/2 (127 x 114)
CB1908R	Square	Steel	1–Type of CB1901R NRP x Frame and door plate		2-CB1901R-NRP	5 x 4 1/2 (127 x 114)
CB1909R	Beveled 1/8" IN 2" (3.2 in 51 mm)	Steel	1–Type of CB1901R NRP x Frame and door plate		2-CB1901R-NRP	5 x 4 1/2 (127 x 114)
CB1967R	Square or beveled (3.2 in 51 mm)	Bronze or Stainless Steel	1–Type of CB1961R NRP x Frame plate ONLY		2-CB1961R-NRP	5 x 4 1/2 (127 x 114)
CB1968R	Square	Bronze or Stainless Steel	1–Type of CB1961R NRP x Frame and door plate		2-CB1961R-NRP	5 x 4 1/2 (127 x 114)
CB1969R	Beveled 1/8" in 2" (3.2 in 51mm)	Bronze or Stainless Steel	1–Type of CB1961R NRP x Frame and door plate		2-CB1961R-NRP	5 x 4 1/2 (127 x 114)

Class Number	Gauge of Metal		Frame Plate				Door Plate				Flat Head Screws/Set		Sets Per Case	Case Weight	
			Length		Width		Length		Width		Wood	Machine		Lbs.	(Kg)
	Inches	(mm)	Inches	(mm)	Inches	(mm)	Inches	(mm)	Inches	(mm)					
CB1970R	.190	(4.8)	5	1.25	1.25	(31.8)					28-12- x 1 1/2	28-12-24 x 1/2	1	6	(3)
CB1908R	.190	(4.8)	5	1.25	1.25	(31.8)	7.78	(198)	1.25	(31.8)	32-12- x 1 1/2	32-12-24 x 1/2	1	7	(3)
CB1909R	.190	(4.8)	5	1.25	1.25	(31.8)	7.64	(194)	1.25	(31.8)	32-12- x 1 1/2	32-12-24 x 1/2	1	7	(3)
CB1967R	.190	(4.8)	5	1.25	1.25	(31.8)					12-12- x 1 1/2	28-12-24 x 1/2	1	6	(3)
CB1968R	.190	(4.8)	5	1.25	1.25	(31.8)	7.78	(198)	1.25	(31.8)	16-12- x 1 1/2	32-12-24 x 1/2	1	7	(3)
CB1968R (32D)	.190	(4.8)	5	1.25	1.25	(31.8)	7.78	(198)	1.25	(31.8)	16-12- x 1 1/2	32-12-24 x 1/2	1	7	(3)
CB1969R	.190	(4.8)	5	1.25	1.25	(31.8)	7.64	(194)	1.25	(31.8)	16-12- x 1 1/2	32-12-24 x 1/2	1	7	(3)
CB1969R (32D)	.190	(4.8)	5	1.25	1.25	(31.8)	7.64	(194)	1.25	(31.8)	16-12- x 1 1/2	32-12-24 x 1/2	1	7	(3)

* Hinges supplied with set screw in barrel, non-removable pin

** For doors over 7' 6" in height, specify additional hinges to order: specify catalog number, finish and hand